


NS 推進管用中押管 (JC)

日本下水道協会規格JSWAS A-2認定番号014501

中押管 S 形の形状と寸法

単位: mm

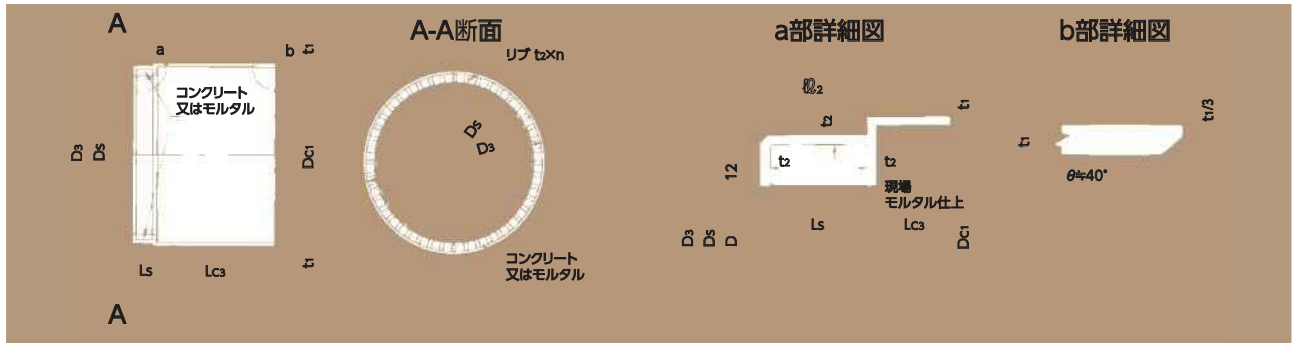


単位: mm

呼び	内径 D	Ds	D3	Dc1	有効長 Ls	Lc3	φ2	t1	t2	リップ (枚)	参考質量 (kg)
☆ 900	900	924	1,054	1,062						24	454
1 000	1,000	1,024	1,174	1,182	190	1,100	174	9	16	28	531
1 100	1,100	1,124	1,284	1,292						32	595
1 200	1,200	1,224	1,404	1,406						36	830
1 350	1,350	1,374	1,564	1,576			176		19	40	975
1 500	1,500	1,524	1,744	1,756						44	1,150
1 650	1,650	1,674	1,914	1,926	195	1,150		12		48	1,340
1 800	1,800	1,824	2,084	2,096			173		22	52	1,510
2 000	2,000	2,024	2,314	2,326						58	1,770
2 200	2,200	2,224	2,544	2,556						64	2,040
2 400	2,400	2,424	2,764	2,778						72	2,780
2 600	2,600	2,624	2,994	3,008	200	1,200	175	16	25	78	3,130
2 800	2,800	2,824	3,224	3,238						84	3,500
3 000	3,000	3,024	3,454	3,468						90	3,890

中押管 T 形の形状と寸法

単位: mm

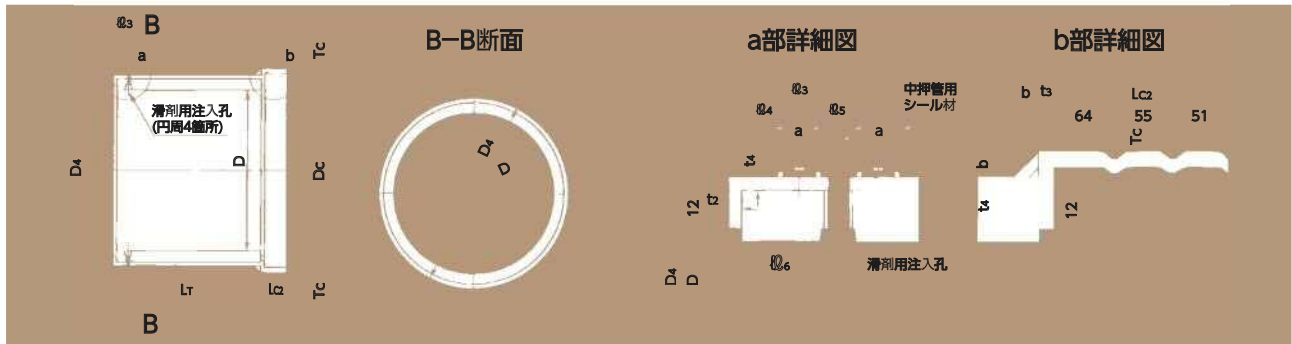

単位: mm

呼び	内径 D	D4	Dc	有効長 Lt	Lc2	φ3	φ4	φ5	φ6	a	b	Tc	t3	t4	φ	参考質量 (kg)
☆ 900	900	1,044	1,071													785
1 000	1,000	1,164	1,191	1,150	125	60	65	92.5	26	18	4.5	9	6	9	6	974
1 100	1,100	1,274	1,301													1,120
1 200	1,200	1,388	1,421													1,310
1 350	1,350	1,551	1,588													1,640
1 500	1,500	1,731	1,768	1,200	170	140	65	75	102.5	30	24	6	6	9	9	2,050
1 650	1,650	1,901	1,938													2,450
1 800	1,800	2,071	2,108													2,850
2 000	2,000	2,301	2,338													3,480
2 200	2,200	2,531	2,568	1,250	150	70	80	110	34	30	9	12	9	9	9	4,170
2 400	2,400	2,749	2,792													5,170
2 600	2,600	2,979	3,022													6,020
2 800	2,800	3,209	3,252													6,940
3 000	3,000	3,439	3,482													7,920

☆社内規格です。