

# アドホール


日本下水道協会下水道用資器材製造工場認定 認定番号 第124504号

(下水道用コンクリート製マンホール)


## 3号マンホール(内径1,500mm, I種・II種・III種)

最大削孔径  $\phi$  1380  
 ヒューム管  $\phi$  1100  
 推進管  $\phi$  1100

### 構造標準図

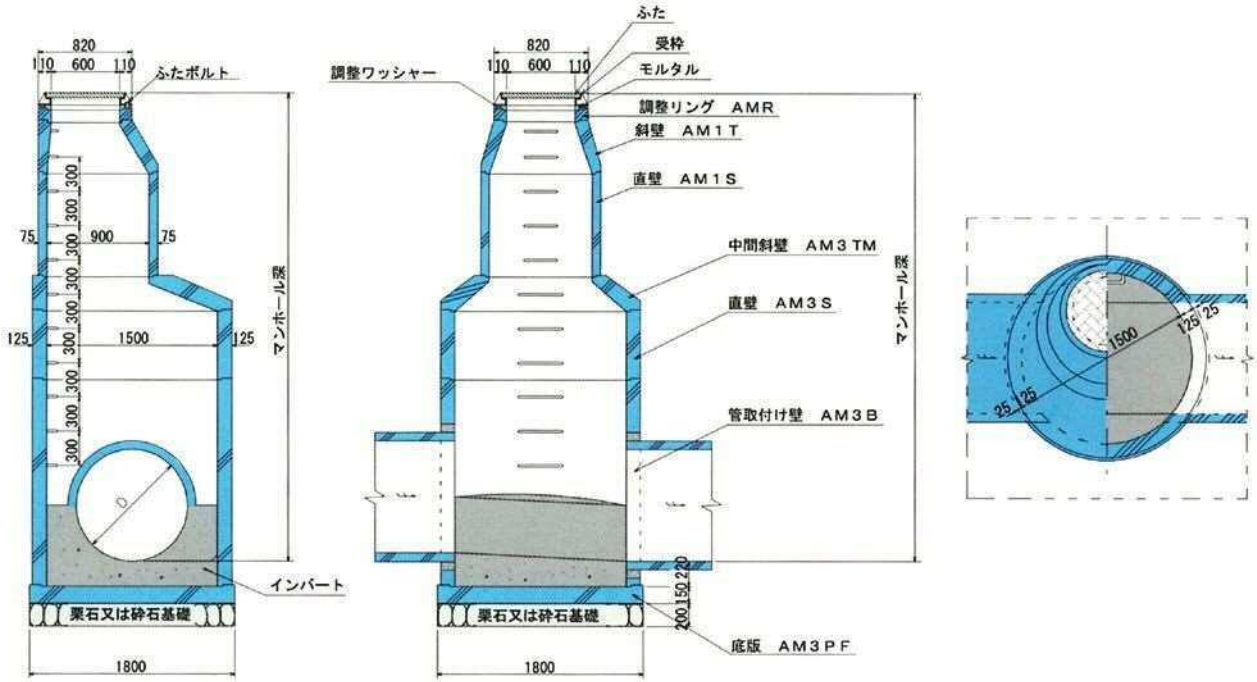

### 部材形状及継手部詳細図

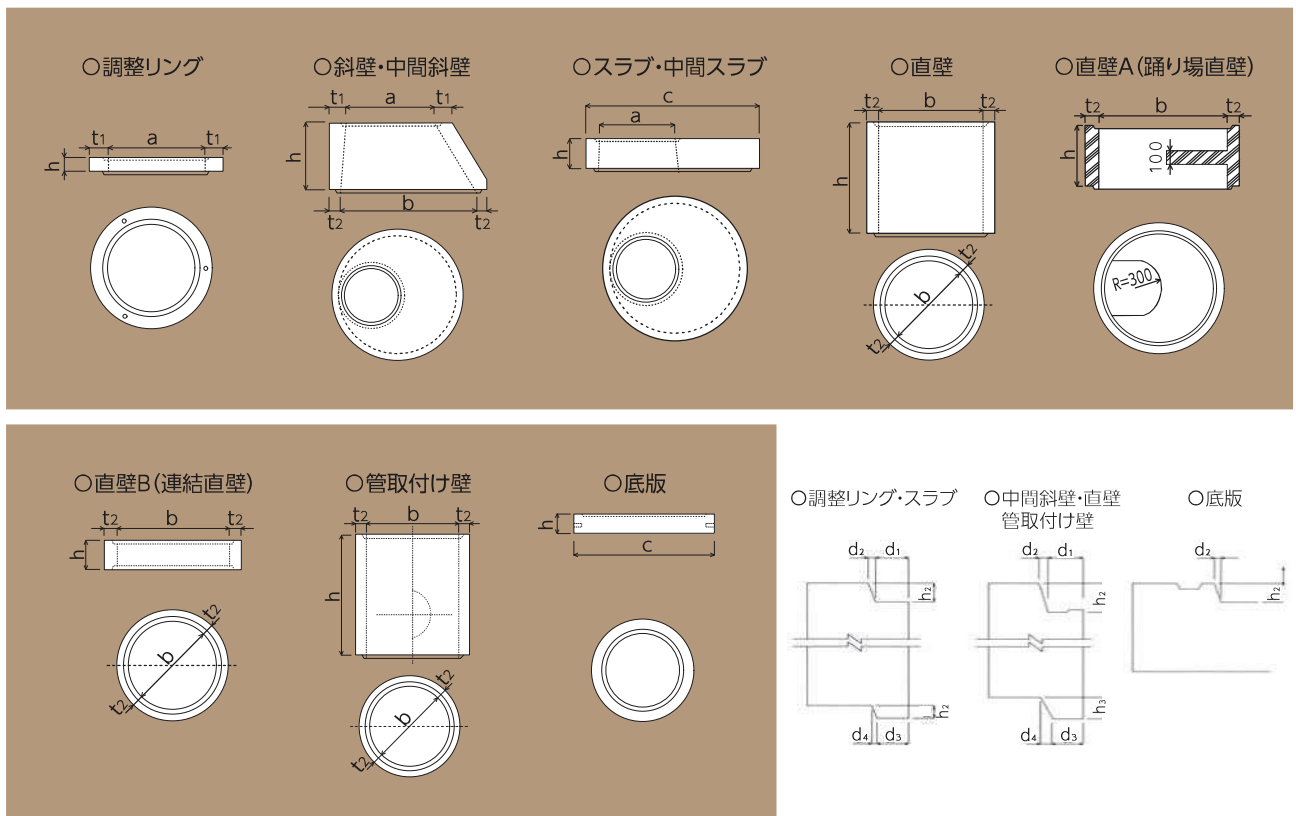

組立マンホール

# アドホール

日本下水道協会下水道用資器材製造工場認定 認定番号 第124504号

(下水道用コンクリート製マンホール)

## 寸法表

単位:mm

部材	記号		a	b	c	h	t <sub>1</sub>	t <sub>2</sub>	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	h <sub>2</sub>	h <sub>3</sub>	有効高さ	質量(kg)	
	固有記号	JSWAS															
I種	調整リング	AMR 5	600	-	-	50	110	-	26	6	25	4	15	10	50	29	
		AMR 10				100									100	59	
		AMR 15				150									150	89	
		AMR 20				200									200	119	
		AMR 910				100									100	92	
		AMR 915				150									150	139	
	中間斜壁	AM3TM 39	CM3TM	900	1500	-	300	125	125	28	7	28	11	23	15	300	774
	スラブ	AM3SB	CM3SB	600	-	1750	195	-	-	26	6	28	11	15	15	200	1060
	直壁	AM3S 30	CM3S	-	1500	-	300	-	125	33	7	28	11	23	15	300	465
		AM3S 60					600									600	934
		AM3S 90					900									900	1400
		AM3S 120					1200									1200	1870
		AM3S 150					1500									1500	2340
		AM3S 180					1800									1800	2810
		AM3S 210					2100									2100	3280
		AM3S 240					2400									2400	3750
直壁A	AM3SA 60	CM3S	-	1500	-	600	-	125	33	7	28	11	23	15	600	1290	
直壁B	AM3SBC 30	CM3S	-	1500	-	315	-	220	33	7	-	-	23	-	300	898	
管取付け壁	AM3B 90	CM3B	-	1500	-	900	-	125	33	7	28	11	23	15	900	1400	
	AM3B 120					1200									1200	1870	
	AM3B 150					1500									1500	2340	
	AM3B 180					1800									1800	2810	
	AM3B 210					2100									2100	3280	
	AM3B 240					2400									2400	3750	
底版	AM3PF	CM3P	-	-	1800	165	-	-	-	7	-	-	15	-	150	957	
II(III)種	直壁	AM3S 30II(III)	CM3S	-	1500	-	300	-	150	33	7	28	11	23	15	300	567
		AM3S 60II(III)					600									600	1140
		AM3S 90II(III)					900									900	1710
		AM3S 120II(III)					1200									1200	2280
		AM3S 150II(III)					1500									1500	2850
		AM3S 180II(III)					1800									1800	3420
		AM3S 210II(III)					2100									2100	4000
		AM3S 240II(III)					2400									2400	4570
	直壁A	AM3SA 60II(III)	CM3S	-	1500	-	600	-	150	33	7	28	11	23	15	600	1490
	直壁B	AM3BC 30II(III)	CM3S	-	1500	-	315	-	220	33	7	-	-	23	-	300	898
	管取付け壁	AM3B 90II(III)	CM3B	-	1500	-	900	-	150	33	7	28	11	23	15	900	1710
		AM3B 120II(III)					1200									1200	2280
		AM3B 150II(III)					1500									1500	2850
		AM3B 180II(III)					1800									1800	3420
		AM3B 210II(III)					2100									2100	4000
		AM3B 240II(III)					2400									2400	4570
底版	AM3PF II(III)	CM3P	-	-	1800	165	-	-	-	5	-	-	15	-	150	957	

注) 1. 下水道協会認定品は、I種およびII種までで、III種については、アドホール工業会規格品である。  
2. II種およびIII種については、同じ形状・寸法である。