


# 鉄筋コンクリートベンチフリューム (BF)

## 形状

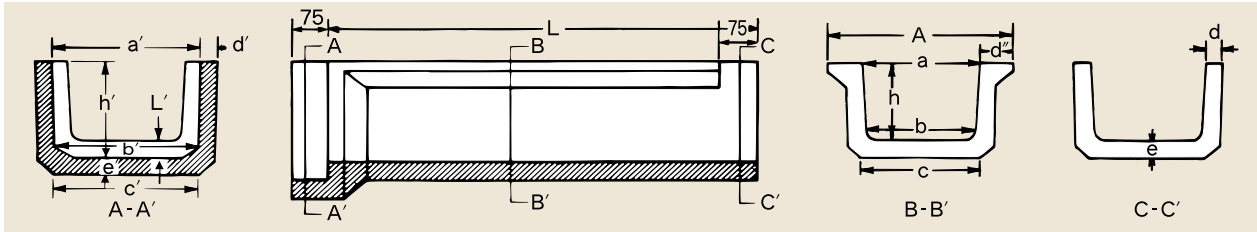

## 寸法表

単位: mm

呼び名	本体寸法 (mm)																参考質量 (kg)	
	a	b	c	d	d''	e	h	A	a'	b'	c'	d'	h'	L'	e'	L	L=1.0m	L=2.0m
200	200	170	205				150	336	276	250	250		193				53	95
250	250	215	250	30	68	35	175	386	326	295	295	30	218	43	35	2,000 (1,000)	64	114
300	300	260	300			40	200	436	376	350	350		248	48	40		81	145
350	350	300	345	35	78	45	235	506	436	400	400	35	288	53	45		106	191
400	400	345	395	40	88	50	260	576	496	453	453	40	318	58	50	1,000	133	239
450	450	390	440				295	626	546	498	498		353				148	268
500	500	435	490		98	55	320	696	606	552	552		383	63	55		180	325
550	550	475	535	45	100	60	355	750	660	606	606	45	425	70	60	1,000	211	405
600	600	520	580				380	800	710	650	650		450				226	-
650	650	565	630			65	415	850	760	707	707		490	75	65		259	-
700	700	610	680	50	110	70	440	920	820	760	760	50	520	80	70	1,000	301	540
800	800	695	770				490	1,020	920	855	855		575				353	-
900	900	785	870			85	550	1,140	1,030	965	965	55	645	95	85		447	-
1 000	1,000	875	965	55	120	90	600	1,240	1,130	1,066	1,066		700			100	90	512

## 寸法許容差

単位: mm

呼び名	a · b	h	d · e	d' · e'	L
200~300	± 3	± 2	± 2	- 5	± 5
350~550	± 5	± 3	+ 3 - 2		
600~1 000	± 7	± 5	+ 5 - 2		